

TECHNISCH DOSSIER – BEVEREN MARTK 2026

CONTACT TECHNIEK : info@studiohaifax.be

PA :

8 x Coda Audio AiRay gevlogen per kant
12 x Coda Audio SCP sub cardio setup
4 x Coda Audio G712

AUDIO :

FOH

1 x LM26
10 Eazy
Shoutset
2 x Cat6A S/FTP 80m guest multi
Allen&Heath SQ6 local desk

STAGE

4 x Coda Audio Cue2
2ch Shure ULX-D
Microphone stands
Backline power
Allen&Heath DX168 local rack


DJ


4 x Pioneer CDJ2000nxs2
1 x Pioneer DJM900nxs2
Netgear switch
2 x HK Audio Linear5 mkII 112XA
2 x HK Audio Linear5 mkII subA

RISERS :

Rolling Risers volgens technische fiches.

Chamsys MQ500 local desk
ELC Node 8s fi + 4 x ELC Splitter DT2210/5
1 x Vicount Concept hazer

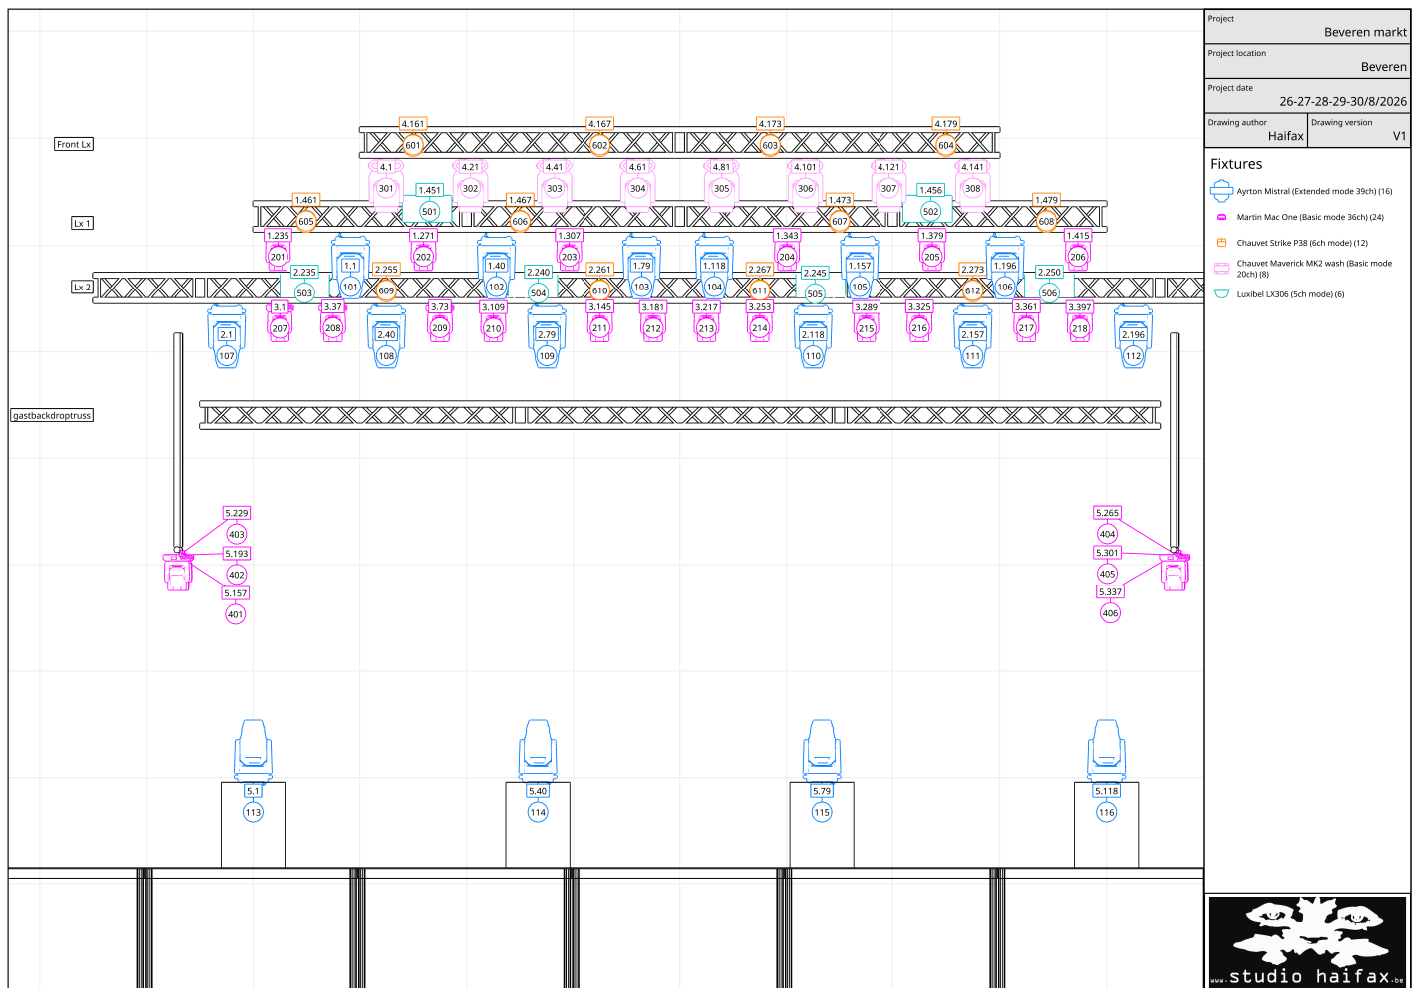

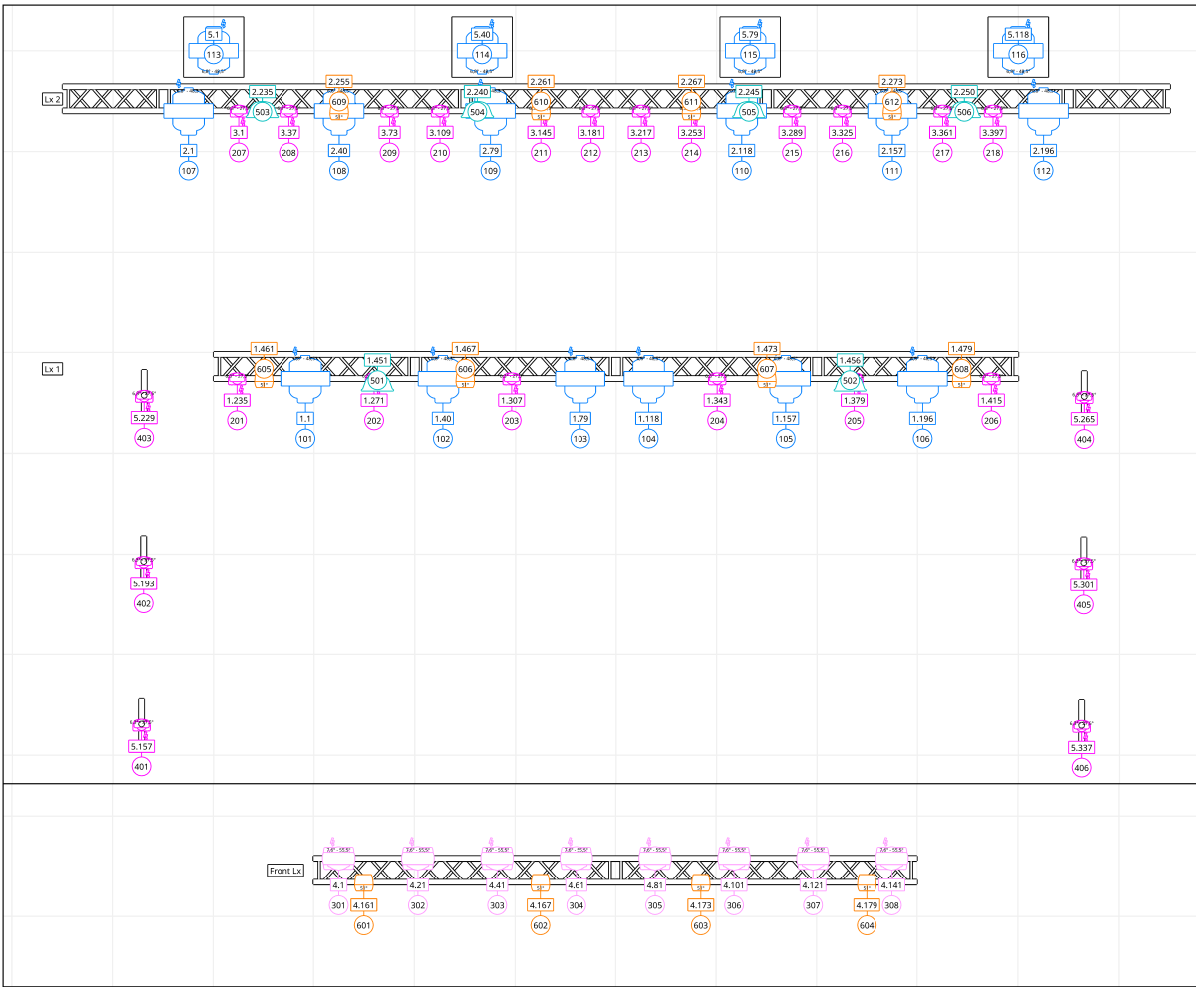

Project	Beveren markt
Project location	Beveren
Project date	26-27-28-29-30/8/2026
Drawing author	Haifax
Drawing version	V1

- Fixtures
- Ayrton Mistral (Extended mode 39ch) (16)
 - Martin Mac One (Basic mode 36ch) (24)
 - Chauvet Strike P38 (6ch mode) (12)
 - Chauvet Maverick MK2 wash (Basic mode 20ch) (8)
 - Luxibel LX306 (Sch mode) (6)



Beveren markt Fixture report

26-27-28-29-30/8/2026 Beveren

Floor

Channel	Patch	Name	Mode	Weight	Rating
113	5.1	Ayrton Mistral-S	Extended	18,9kg	450W
114	5.40	Ayrton Mistral-S	Extended	18,9kg	450W
115	5.79	Ayrton Mistral-S	Extended	18,9kg	450W
116	5.118	Ayrton Mistral-S	Extended	18,9kg	450W
				75,6kg	1,8KW

Front Lx

Channel	Patch	Name	Mode	Weight	Rating
301	4.1	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
302	4.21	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
303	4.41	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
304	4.61	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
305	4.81	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
306	4.101	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
307	4.121	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
308	4.141	Chauvet Maverick MK2 Wash	Basic [Control=Single] Rev2	14,8kg	509W
601	4.161	Chauvet Strike P38	6 Channel	3,8kg	58W
602	4.167	Chauvet Strike P38	6 Channel	3,8kg	58W
603	4.173	Chauvet Strike P38	6 Channel	3,8kg	58W
604	4.179	Chauvet Strike P38	6 Channel	3,8kg	58W
				133,6kg	4kW 304W

Lx 1

Channel	Patch	Name	Mode	Weight	Rating
101	1.1	Ayrton Mistral-S	Extended	18,9kg	450W
102	1.40	Ayrton Mistral-S	Extended	18,9kg	450W
103	1.79	Ayrton Mistral-S	Extended	18,9kg	450W
104	1.118	Ayrton Mistral-S	Extended	18,9kg	450W
105	1.157	Ayrton Mistral-S	Extended	18,9kg	450W
106	1.196	Ayrton Mistral-S	Extended	18,9kg	450W
201	1.235	Martin MAC One	Basic 1.3.0	4,4kg	180W
202	1.271	Martin MAC One	Basic 1.3.0	4,4kg	180W
203	1.307	Martin MAC One	Basic 1.3.0	4,4kg	180W
204	1.343	Martin MAC One	Basic 1.3.0	4,4kg	180W
205	1.379	Martin MAC One	Basic 1.3.0	4,4kg	180W
206	1.415	Martin MAC One	Basic 1.3.0	4,4kg	180W
501	1.451	Luxibel B Strobe460-LX306	5 Channel Mode	4,5kg	460W
502	1.456	Luxibel B Strobe460-LX306	5 Channel Mode	4,5kg	460W
605	1.461	Chauvet Strike P38	6 Channel	3,8kg	58W
606	1.467	Chauvet Strike P38	6 Channel	3,8kg	58W
607	1.473	Chauvet Strike P38	6 Channel	3,8kg	58W
608	1.479	Chauvet Strike P38	6 Channel	3,8kg	58W
				164kg	4kW 932W